

DO NOT
SCALE FROM
THIS PRINT

BPCU-C-X-X.XX-XX-P

END 1

-C: SEALED TYPE C
RECEPTACLE

STYLE

-P: PLASTIC

PLATING

-S: CONTACT AREA 30μ" GOLD

END 2

-UC: UNSEALED TYPE C PLUG
-BC: BLUNT CUT

ASSEMBLED LENGTH

-0.25: (0.25 M) CABLE

-0.50: (0.5 M) CABLE

-0.75: (0.75 M) CABLE

-1.00: (1 M) CABLE

STANDARD LENGTH (SEE NOTE 5 & 6)


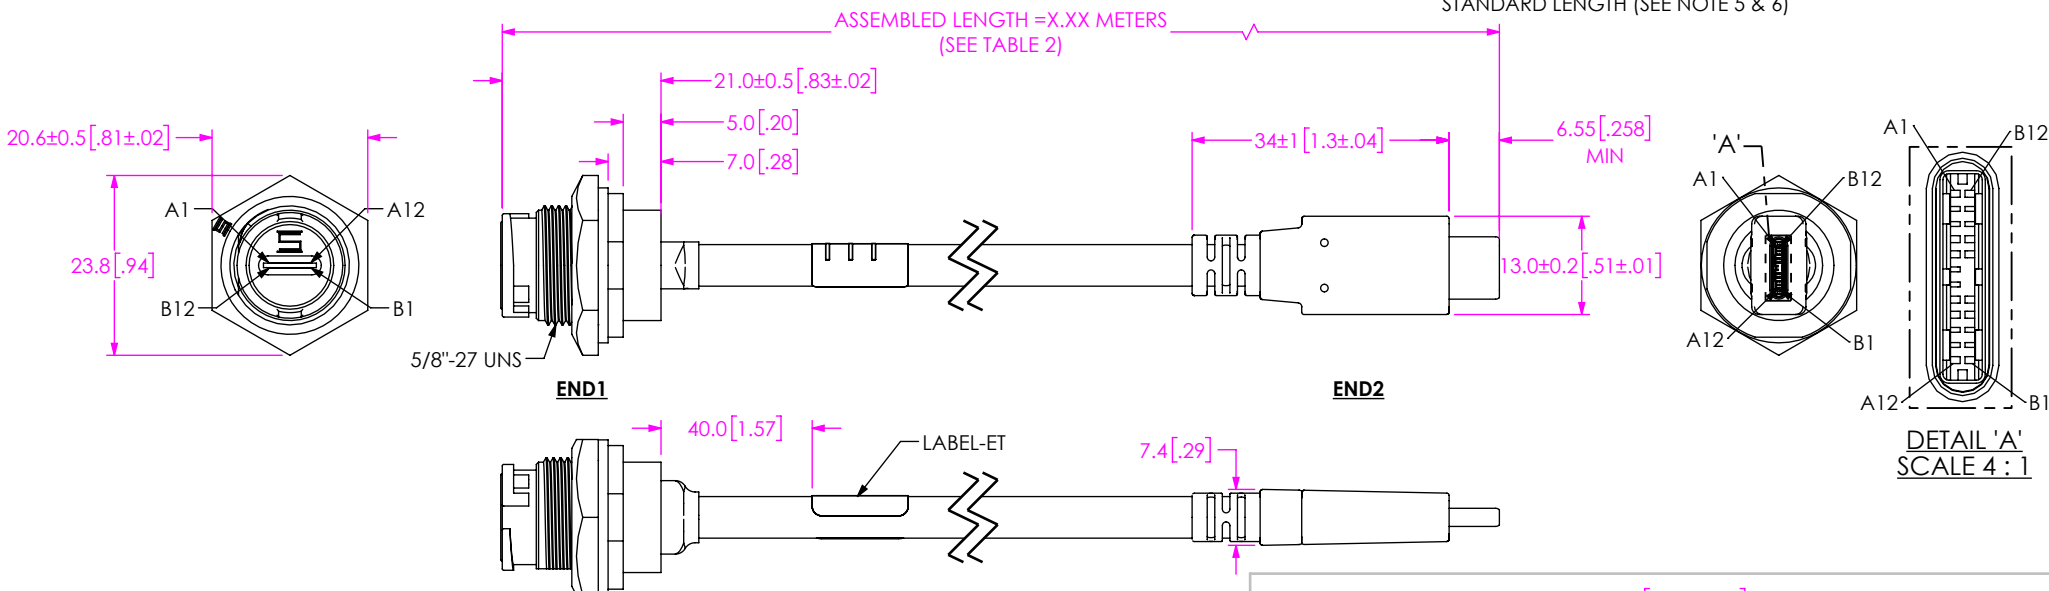


FIG 1
BPCU-C-X-X.XX-UC-P SHOWN

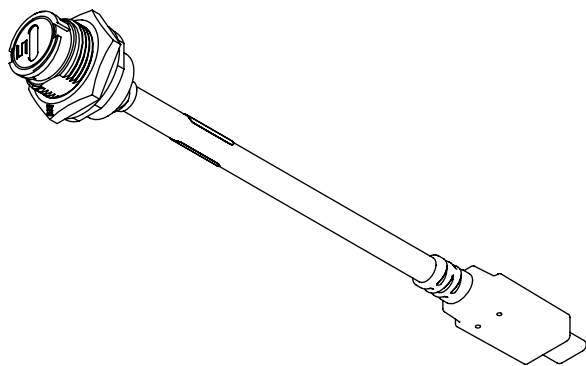


NOTES:

1. RECOMMEND PANEL THICKNESS: 0.8[.03] TO 3.0[.12].
2. RECOMMEND TORQUE: 9~10 KGF-CM.
3. MATING DUST CAP P/N: DCA-BRU-C-01.
4. MATING PART P/N: BCU-C-X-X.XX-XX-P.
5. CABLE LENGTH 2M MAX. OTHER LENGTH REQUIRE MOQ.
6. CABLE LENGTHS ABOVE 0.8M FOR GEN2 AND 1.5M FOR GEN1 ARE NOT SUPPORT WITH SI DATA.

TABLE 2	
ASSEMBLED LENGTH	TOLERANCE
≤0.25M	+25 MM
0.5M-1.5M	+50 MM
2.0M	+100 MM

RECOMMENDED PANEL CUT-OUT

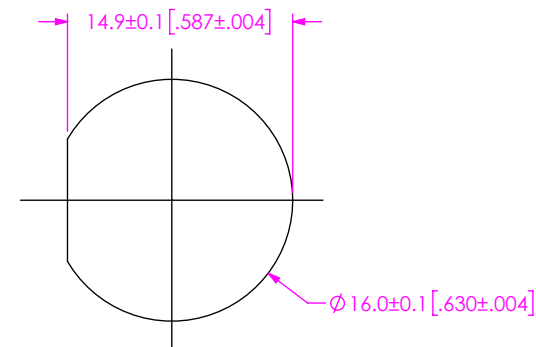

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND ALL DESIGN, MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC, INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMTEC, INC.

DO NOT SCALE DRAWING

SHEET SCALE: 1:1

DESCRIPTION:

USB-C CABLE ASSEMBLY

DWG. NO.

BPCU-C-X-X.XX-XX-P

BY: JACK Z

2/22/2022

SHEET 1 OF 3

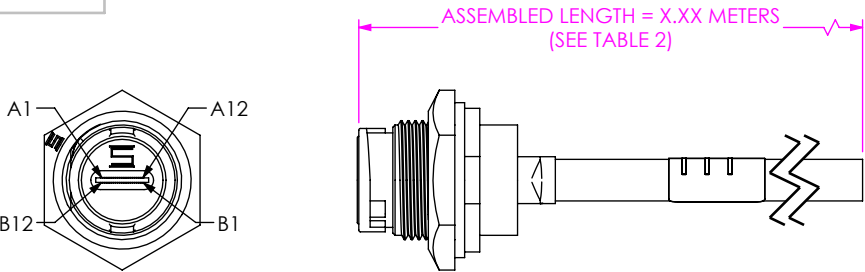


FIG 2
BPCU-C-X-X.XX-BC-P SHOWN
(DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG 1)




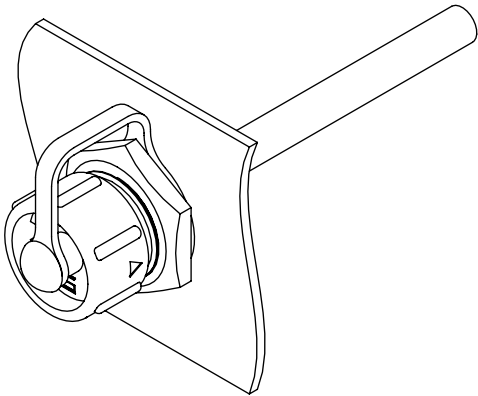


TABLE 1: PIN-OUT				
END 1	COLOR	END 2		
		-UC	-SC	-BC
A1	DRAIN	A1	A1	NC
A2	YELLOW (BLUE MYLAR)	B11	B11	
A3	BLUE (BLUE MYLAR)	B10	B10	
A4	RED (24 AWG)	A4	A4	
A5	BLUE (32 AWG)	A5	A5	
A6	GREEN	A6	A6	
A7	WHITE	A7	A7	
A8	RED (32 AWG)	B8	B8	
A9	RED (24 AWG)	A9	A9	
A10	VIOLET (SILVER MYLAR)	B3	B3	
A11	ORANGE (SILVER MYLAR)	B2	B2	
A12	DRAIN	A12	A12	
B1	DRAIN	B1	B1	
B2	YELLOW (SILVER MYLAR)	A11	A11	
B3	BLUE (SILVER MYLAR)	A10	A10	
B4	RED (24 AWG)	B4	B4	
B5	YELLOW (32 AWG)	B5	B5	
B6	NO CONNECTED	B6	B6	
B7	NO CONNECTED	B7	B7	
B8	BLACK (32 AWG)	A8	A8	
B9	RED (24 AWG)	B9	B9	
B10	VIOLET (BLUE MYLAR)	A3	A3	
B11	ORANGE (BLUE MYLAR)	A2	A2	
B12	DRAIN	B12	B12	

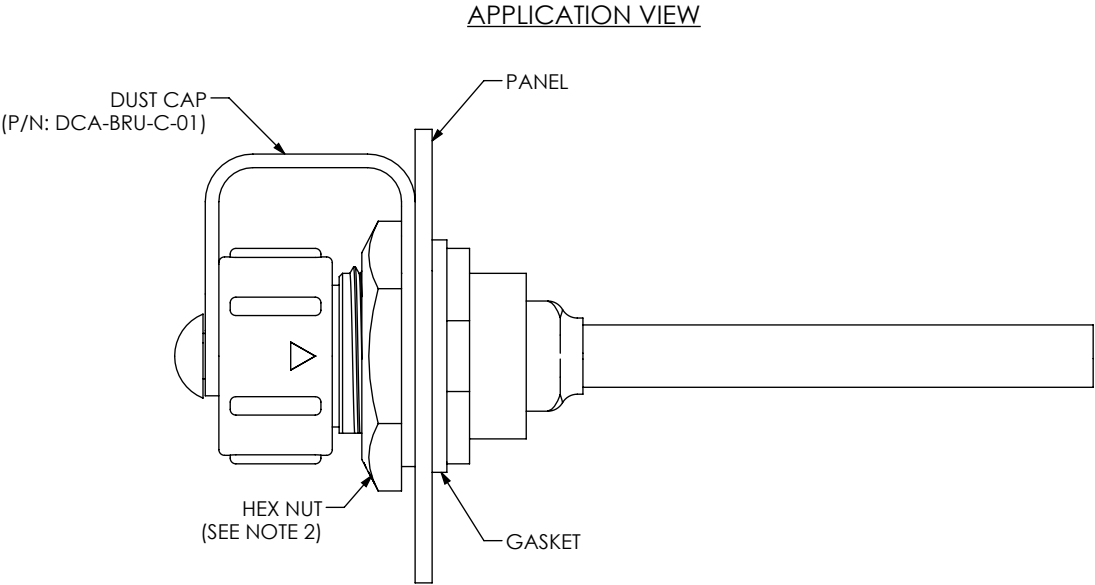

• PROPRIETARY NOTE • THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND ALL DESIGN, MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC, INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMTEC, INC.		 520 PARK EAST BLVD, NEW ALBANY, IN 47150 PHONE: 812-944-6733 FAX: 812-948-5047 e-Mail: info@SAMTEC.com code 55322	
SHEET SCALE: 1:1		DESCRIPTION: USB-C CABLE ASSEMBLY	
		DWG. NO. BPCU-C-X-X.XX-XX-P	
BY: JACK Z		2/22/2022	SHEET 2 OF 3

CABLE SPECIFICATION						
JACKET	MATERIAL	--	TPE			
	DIAMETER	mm	4.8 ±0.15			
	AVERAGE THICKNESS	mm	0.40 REF			
CONSTRUCTION ITEM			CONSTRUCTION ITEM A	CONSTRUCTION ITEM B	CONSTRUCTION ITEM C	CONSTRUCTION ITEM D
CONDUCTORS	MATERIAL	--	TINNED COPPER	TINNED COPPER	TINNED COPPER	TINNED COPPER
	CONSTRUCTION AWG	AWG	32	32	32	24
INSULATORS	MATERIAL	--	PP	PP	PP	PP
	AVERAGE THICKNESS	mm	0.18 REF	0.18 REF	0.15 REF	0.15 REF
MYLAR	MATERIAL	--	AL-FOIL/ MYLAR			
BRAID	MATERIAL	--	TINNED COPPER			
DRAIN WIRE	MATERIAL	--	TINNED COPPER			
	CONSTRUCTION AWG	AWG	24			

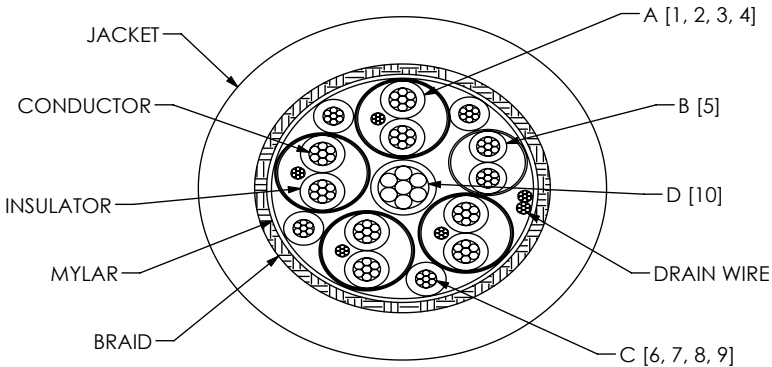

- COLOR CODE**
- 1. YELLOW * BLUE (BLUE MYLAR)
 - 2. VIOLET * ORANGE (BLUE MYLAR)
 - 3. YELLOW * BLUE (SILVER MYLAR)
 - 4. VIOLET * ORANGE(SILVER MYLAR)
 - 5. GREEN * WHITE
 - 6. BLACK
 - 7. BLUE
 - 8. RED
 - 9. YELLOW
 - 10. RED

• PROPRIETARY NOTE •
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND ALL DESIGN, MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC, INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMTEC, INC.

samtec
520 PARK EAST BLVD, NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail info@SAMTEC.com code 55322

SHEET SCALE: 1:1

DESCRIPTION: USB-C CABLE ASSEMBLY

DWG. NO. BPCU-C-X-X.XX-XX-P

BY: JACK Z 2/22/2022 SHEET 3 OF 3